

## CENTRIFUGAL FINISHING MACHINES



The **Roto-Max®** line are a series of centrifugal energy machines. The machine functions with a rotating disc or spinner in the bottom of the finishing chamber, and a stationary wall that the rotating disc meets with a precision gap.

The part and media mix is pushed outward on the rotating disc to the stationary sidewall. As the media is pushed, pressure builds and pushes the media and parts upward on the sidewall until the media falls back to the center of the rotating disc in a cyclonic action. This smooth and continuous motion produces an energy level up to 15 times greater than normal vibratory finishing systems.

**Roto-Max®** utilizes an Up-Flow® compound and water system which cools the gap between the disc and the wear-ring or sidewall moving abrasive debris upward and out of the finishing chamber through a sidewall drain.

### FEATURES

- Cycle times up to 15 times faster than vibratory finishing.
- Improves surfaces: deburrs, descales, deflashes and burnishes.
- Advanced seal design prevents intrusion of smaller parts and media, thus prolonging tub and rotor life.
- Processes all types of material - *Metal, ceramic, plastic and rubber.*
- Wider range of surface finishes are attainable with a given media.




Authorized Distributor:



**Fortune Metal Finishing Corp.**  
116 Gould Street  
Needham Heights, MA 02494  
866.449.4160  
sales@fortunemetal.com

# Up-Flow<sup>®</sup> Technology

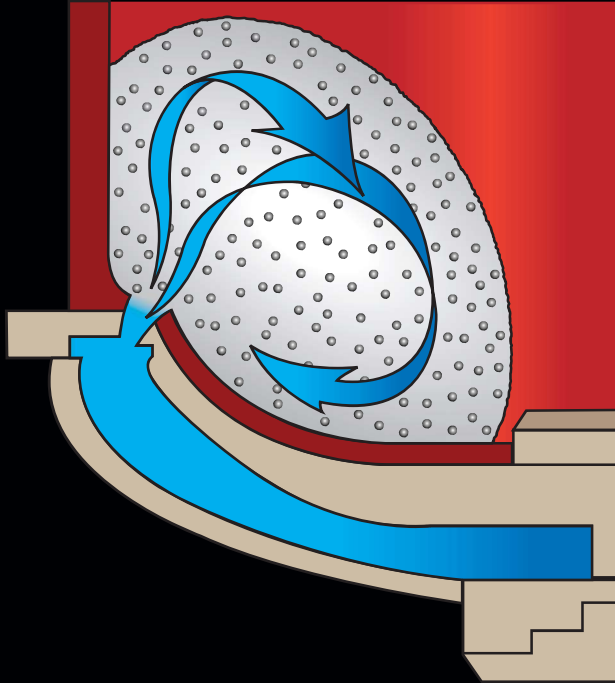

The **Roto-Max<sup>®</sup>** has a unique compound delivery system in the centrifugal disc market. The patented process is called **Up Flow<sup>®</sup>**. The name is derived from the compound being added to the bowl from under the media, and the resulting waste then exiting through a drain near the top of the media.

This **Up Flow<sup>®</sup>** technology, along with the adjustable seal gap height, greatly lengthen the life of the seal gap over other centrifugal disc machines. The greatest wear to the urethane lining are the particulates that come off the parts and media as it wears. With down flow compound, the particulates are sent through the lining.

**Up Flow<sup>®</sup>** technology significantly reduces the wear on the urethane, so can expect to have more 'up time' a with **Roto-Max<sup>®</sup>** centrifugal disc than other centrifugal disc machines.

## Industries Served

Roto-Max<sup>®</sup> Centrifugal Disc Machines are used in a wide variety of applications. Because the machine is a high energy machine...it works well with smaller parts with small media structures. Roto-Max<sup>®</sup> can remove flash from O-ring and other seal material shapes, medical devices and implant components, aerospace alloy materials, firearm components, coins, automotive parts and many more.

*Hammond* **ROTO FINISH**



**Fortune Metal Finishing Corp.**  
 116 Gould Street  
 Needham Heights, MA 02494  
 866.449.4160  
 sales@fortunemetal.com

# CENTRIFUGAL FINISHING MACHINES



**RM-1 in Running Position**



**RM-1 in Unload Position**



**RM-1 SC in Running Position**



**RM-1 SC in Unload Position**

### Built-in Separation

The RM-1SC is fitted with a separation device which allows the operator to rotate the process chamber downward with an electric driven actuator. This allows media and part separation of larger hand picked parts. When the tub is raised the media load returns to the process chamber. To unload the media, the operator opens the door at the end of the separator.

### Abbreviation Key

- A** - Automatic
- N** - No Separation
- P** - Power Separation
- SC** - Self Contained Separation (RM-1 Only)

## ROTO-MAX® Specifications

MODEL	Total Capacity L (cu.ft.)	Maximum Working Capacity L (cu.ft.)	Length mm (in.)	Width mm (in.)	Height mm (in.)	Process Bowl Height mm (in.)	Process Bowl Diameter mm (in.)	Drain Sizes mm (in.) / # of Drains	Motor Horse Power kw (HP)	460 Volts Amp Load	230 Volts Amp Load	Aprox Shipping Weight kg (lbs.)
RM-1 N	56 (1.976)	22 (.75)	1270 (50)	1041 (41)	1549 (61)	1168 (46)	482 (19)	38 (1.5") / 2	2.2 (3)	6	12	454 (1,000)
RM-1 SC	56 (1.976)	22 (.75)	2070 (81.5)	1257 (49.5)	2209 (87)	1468 (57.8)	482 (19)	38 (1.5") / 2	2.2 (3)	6	12	1380 (1,850)
RM-1 P	56 (1.976)	22 (.75)	2504 (98.6)	1041 (41)	1549 (61)	1168 (46)	482 (19)	38 (1.5") / 2	2.2 (3)	6	12	1304 (2,875)
RM-2 N	112 (3.945)	57 (2)	1422 (56)	1422 (56)	1625 (64)	1511 (59.5)	647 (25.5)	102 (4") / 2	3.7 (5)	8.6	16.2	1315 (2,900)
RM-2 P	112 (3.945)	57 (2)	1671 (65.8)	1422 (56)	1625 (64)	1511 (59.5)	647 (25.5)	102 (4") / 2	3.7 (5)	8.6	16.2	1406 (3,100)
RM-2 A	112 (3.945)	57 (2)	2223 (87.5)	1422 (56)	3353 (132)	1524 (60)	647 (25.5)	102 (4") / 2	3.7 (5)	14	25	2767 (5,900)
RM-3 N	145 (5.107)	85 (3)	1422 (56)	1422 (56)	1625 (64)	1612 (63.5)	647 (25.5)	102 (4") / 2	5.6 (7.5)	14	25	1315 (2,900)
RM-3 P	145 (5.107)	85 (3)	1671 (65.8)	1422 (56)	1625 (64)	1612 (63.5)	647 (25.5)	102 (4") / 2	5.6 (7.5)	14	25	1406 (3,100)
RM-3 A	145 (5.107)	85 (3)	2222 (87.5)	1397 (55)	3353 (132)	1829 (72)	647 (25.5)	102 (4") / 2	5.6 (7.5)	14	25	2767 (6,100)
RM-6 N	323 (11.401)	170 (6)	1803 (71)	1676 (66)	2082 (82)	1943 (76.5)	952 (37.5)	102 (4") / 2	7.5 (10)	17	31	1814 (4,000)
RM-6 P	323 (11.401)	170 (6)	1920 (75.6)	1676 (66)	2082 (82)	1943 (76.5)	952 (37.5)	102 (4") / 2	7.5 (10)	17	31	2320 (5,115)
RM-6 A	323 (11.401)	170 (6)	2540 (100)	1930 (76)	3886 (153)	2057 (81)	952 (37.5)	102 (4") / 2	7.5 (10)	17	31	3900 (8,600)
RM-7 N	367 (12.945)	198 (7)	1803 (71)	1676 (66)	2082 (82)	1943 (76.5)	952 (37.5)	102 (4") / 2	11.2 (15)	21	42	1814 (4,000)
RM-7 P	367 (12.945)	198 (7)	1920 (75.6)	1676 (66)	2082 (82)	1943 (76.5)	952 (37.5)	102 (4") / 2	11.2 (15)	21	42	2320 (5,115)
RM-7 A	367 (12.945)	198 (7)	2540 (100)	1930 (76)	3886 (153)	2057 (81)	952 (37.5)	102 (4") / 2	11.2 (15)	21	42	3900 (8,600)



**MEDIA** <

Wet Process Stainless Steel

**CLEANING COMPOUND** <

Roto-Brite®

**PROCESS TIME** <

4 to 20 minutes

# CENTRIFUGAL FINISHING



**MEDIA** <

Dry Process Walnut Shell

**CLEANING COMPOUND** <

CB-16 WSW

**PROCESS TIME** <

4 to 20 minutes

## CENTRIFUGAL FINISHING MACHINES

The **Roto-Max<sup>®</sup> Revolution** is a new patented “all-in-one” machine from Hammond Roto-Finish. The Revolution features the RM-2 or RM-6 centrifugal disc section integrated into a machine that has one main moving pivot point which, depending on which feature is activated, will move the process bowl to empty the media and part mixture onto the built-in separator. This built-in separator is also the return media hopper, so the media is automatically reloaded into the process chamber to start the operation over again.

The **Roto-Max<sup>®</sup> Revolution** is compact and can be easily expanded to accept added features for material handling, or secondary processing steps.

**US Patent Number 8,801,498 B2**



◀ Process Position

Media & Parts Loading to Process Chamber



▲ Unload and Separation Position



Authorized Distributor:



**Fortune Metal Finishing Corp.**  
 116 Gould Street  
 Needham Heights, MA 02494  
 866.449.4160  
 sales@fortunemetal.com

**Abbreviation Key**  
**R** - Revolution  
**RD** - Revolution Dry Process

# ROTO-MAX® REVOLUTION Specifications

MODEL	Total Capacity L (cu.ft.)	Maximum Working Capacity L (cu.ft.)	Length mm (in.)	Width mm (in.)	Height mm (in.)	Process Bowl Height mm (in.)	Process Bowl Diameter mm (in.)	Drain Sizes mm (in.) / # of Drains	Motor Horse Power kw (HP)	460 Volts Amp Load	230 Volts Amp Load	Aprox Shipping Weight kg (lbs.)
RM-2 R	112 (3.945)	57 (2)	2133 (84)	1295 (51)	2286 (90)	1143 (45)	647 (25.5)	102 (4") / 2	3.7 (5)	8.6	16.2	1270 (2,800)
RM-2 RD	112 (3.945)	57 (2)	2133 (84)	1295 (51)	2286 (90)	1143 (45)	647 (25.5)	102 (4") / 2	3.7 (5)	8.6	16.2	1270 (2,800)
RM-3 R	145 (5.107)	85 (3)	2133 (84)	1295 (51)	2286 (90)	1143 (45)	647 (25.5)	102 (4") / 2	5.6 (7.5)	14	25	1315 (2,900)
RM-3 RD	145 (5.107)	85 (3)	2133 (84)	1295 (51)	2286 (90)	1143 (45)	647 (25.5)	102 (4") / 2	5.6 (7.5)	14	25	1315 (2,900)
RM-6 R	323 (11.401)	170 (6)	2743 (108)	1829 (72)	2895 (114)	1320 (52)	952 (37.5)	102 (4") / 2	7.5 (10)	17	31	1769 (3,900)
RM-6 RD	323 (11.401)	170 (6)	2743 (108)	1829 (72)	2895 (114)	1320 (52)	952 (37.5)	102 (4") / 2	7.5 (10)	17	31	1769 (3,900)

## All Standard Units Include:

- Semi-Automatic Control Panel (Free standing)
- Non-Electric Compound System
- 230/460V, 3 PH, 60 HZ
- Smooth or Ribbed Polyurethane Wall
- Patented Up-Flow® System
- Variable Speed



Automated Roto-Max® cell.  
 Parts weigh/load RM-2R.  
 V-Max® polish.

MODELS