

SONIC LIFTKLEEN™



Authorized Distributor:
Fortune Metal Finishing Corp.
 116 Gould Street
 Needham Heights, MA 02494
 866.449.4160
 sales@fortunemetal.com


FOCUSED ULTRASONIC POWER

Graymills unique “V-focused” tank design increases ultrasonic cleaning power and speed for intricate parts as well as large industrial pieces.



TUSR24 (Optional roller platform shown)

TUSR24/36

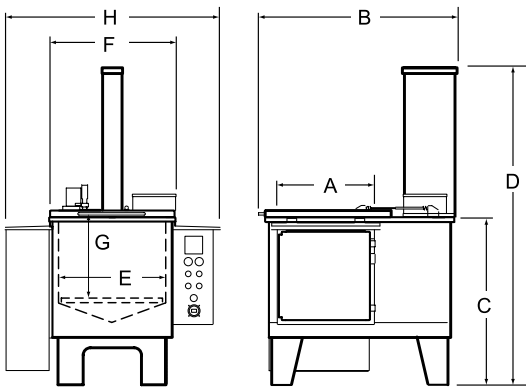

Powerful precision cleaning

Long warranty - 10 years transducer bonding, 2 years transducers, 5 years sonic generators

40kHz Ultrasonic
(25kHz and 68kHz available)

Stainless steel platform

Easy access to load and unload parts

Thermostatically controlled tank heaters

Deep “V-shaped” tank focuses power

Digital cycle timer

Oil skimmer

Corrosion-resistant and designed for longevity

Double walled & insulated; reduces heat loss

Low liquid heater protection included

MODEL NO.	A	B	C	D	E	F	G	H
TUSR24	24"	41½"	34½"	66"	20½"	20½"	12"	40"
TUSR36	34"	53½"	34½"	75"	25½"	29½"	18"	45"

SPECIFICATIONS	TUSR24	TUSR36
Ultrasonic Power (Watts)	4000	6000
Heater Power	6.75 kW	6.75 kW
Voltage	230V, 1 Phase	230V, 1 Phase
Standard Lift Capacity @ PSI	150 lbs @ 90	200 lbs @ 90
Oscillation Stroke Length	3"	3"
Strokes Per Minute	25-40	25-40
Immersion Space	24" x 20" x 12"	34" x 25½" x 18"
Overall Dimensions	39" x 45" x 66"	50" x 50" x 75"
Liquid Capacity	47 gal	118 gal
Platform Dimensions	22" x 19"	25" x 32"
Air Inlet	¼"	¼"
Drain	2"	2"
Automatic Lid	Standard	Standard

PARTS WASHERS: **ULTRASONIC**